

ProPlex® IP

IP-RATED PORTABLE
DATA DISTRIBUTION

NEW!



The new ProPlex IP range is a game-changer in portable data distribution, designed for demanding outdoor environments, including live productions, movie sets, and temporary installations of all kinds. Built around state-of-the-art ProPlex electronics, these devices ensure long-term performance in even the worst rainy or dusty conditions.

Cutting-edge technology in extra durable IP-rated enclosures, to address the unique needs of outdoor and temporary installations. Delivering performance, reliability and protection wherever it's needed most.

Key Features:

- Powerful, proven, feature-rich ProPlex electronics
- IP65 + IP67 ingress protection rating
- Secure and uninterrupted data transmission even in rainy or dusty locations
- Intuitive touch control, user-friendly interfaces
- Highly durable die-cast body with impact-resistant finish
- Optional backplates - various mounting options
- Mains power: 100-240V 50/60Hz

Worldwide Exclusive Distribution

Los Angeles
+1 818.899.8818

London
+44 (0)20.8574.9700

New York
+1 201.896.8600

tmb
www.ProPlex.com

Toronto
+1 519.538.0888

Beijing
+86 10.8492.1587

Riga
+371 6389 8886

ProPlex® IP

SGBS IP SIMPLE GIGABIT SWITCH

- ProPlex “Simple” push-button switch configuration
- 1 x 1 Gbit Duo or Quad Fiber, with 5 x copper ports or 6 x copper ports
- LCD screen with armored glass and capacitive control buttons
- 1 x PoE / PoE+ input
- 4 x PoE+ (30W) outputs, 120W total budget
- IP67. Fiber models are IP65



Technical Specifications

Model	SGBS IP		
Part Number	PPSGBSPO1Q5MIP	PPSGBSPO1D5MIP	PPSGBSPO006MIP
Copper Ports	5 x RJ45 E-CON TYPE IP67	5 x RJ45 E-CON TYPE IP67	6 x RJ45 E-CON TYPE IP67
Optical Ports (*optional)	O-CON TYPE QUAD IP65	O-CON TYPE DUO IP65	-
PoE Input Ports	1 X POE OR POE+ (IEEE 802.3AF / IEEE 802.3AT)		
PoE Output Ports	4 X POE+ (IEEE 802.3AT)		
Ethernet Type	GIGABIT ETHERNET (1 GBIT)		
Power Input	100-240 VAC 50-60 HZ		
Power Connector	TRUE-1TYPE IP67 IN AND THRU		
Power Consumption	150 W MAX		
Cooling	PASSIVE		
Operating Temperature	-4 TO +104 °F [-20 TO +40 °C]		
IP Rating	IP65	IP65	IP67
LCD Screen	IK08 RATED ARMORED GLASS		
Unit Dimensions (WxHxD)	6.3 X 10.3 X 2.9 IN [159.8 X 263.3 X 73.2 MM]		
Weight	1.2 LBS [0.5 KG]		

Los Angeles
+1 818.899.8818

London
+44 (0)20.8574.9700

New York
+1 201.896.8600


tmb
www.ProPlex.com

Toronto
+1 519.538.0888

Beijing
+86 10.8492.1587

Riga
+371 6389 8886

Wallmount Adapter

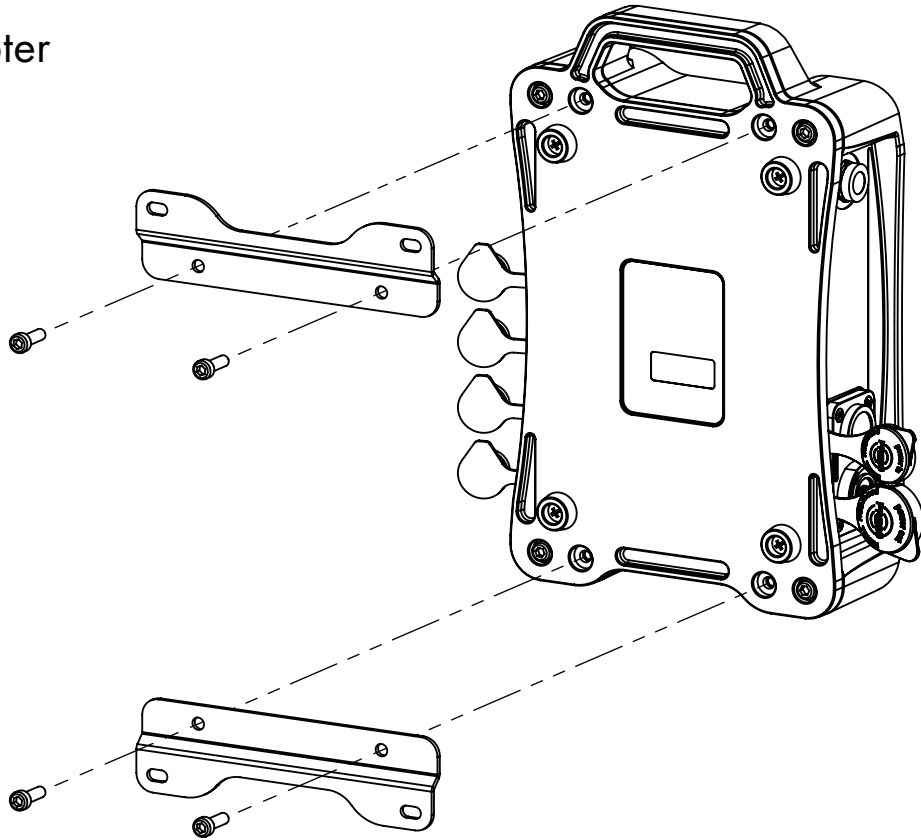

Clamp Mount

