ProPlex® IQ

IQ Micro
Ethernet-DMX Node

2 DMX Universes that go anywhere! Big power in a small package!

The IQ Micro 2-universe, 2-port bidirectional Ethernet-DMX node packs a lot of merging/converting power in a small package! Convert between Ethernet and 2 universes of DMX. Neutrik connectors are featured and large navigation buttons with easy-to-read LCD makes programming simple, easy, and quick.

The handy Mounting Plate makes installation effortless and the extremely compact unit will fit anywhere. ProPlex IQ products are rugged, intuitive, and quick to configure. Powered by PoE, the IQ Micro is fully RDM functional and interfaces with ProPlex Software!



- **Bidirectional, 2-universe, 2-port merging and Ethernet protocol conversion of DMX data (sACN/ArtNet)**
- **Rugged, extremely compact Micro enclosure with optional mounting plate**
- **Intuitive, simple web interface or front panel control of all basic functions**
- **RDM functionality for complete system feedback and monitoring**
- **All Neutrik connectors: XLR and EtherCon**

BUILT TO LAST!

ProPlex - DATA DISTRIBUTION YOU CAN DEPEND ON

Worldwide Exclusive Distribution


Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb www.tmb.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +371 6389 8886

© 2025, TMB. All rights reserved. LITPPXIQMICRO Effective: 25 March 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com


ProPlex® IQ

IQ Micro
Ethernet-DMX Node

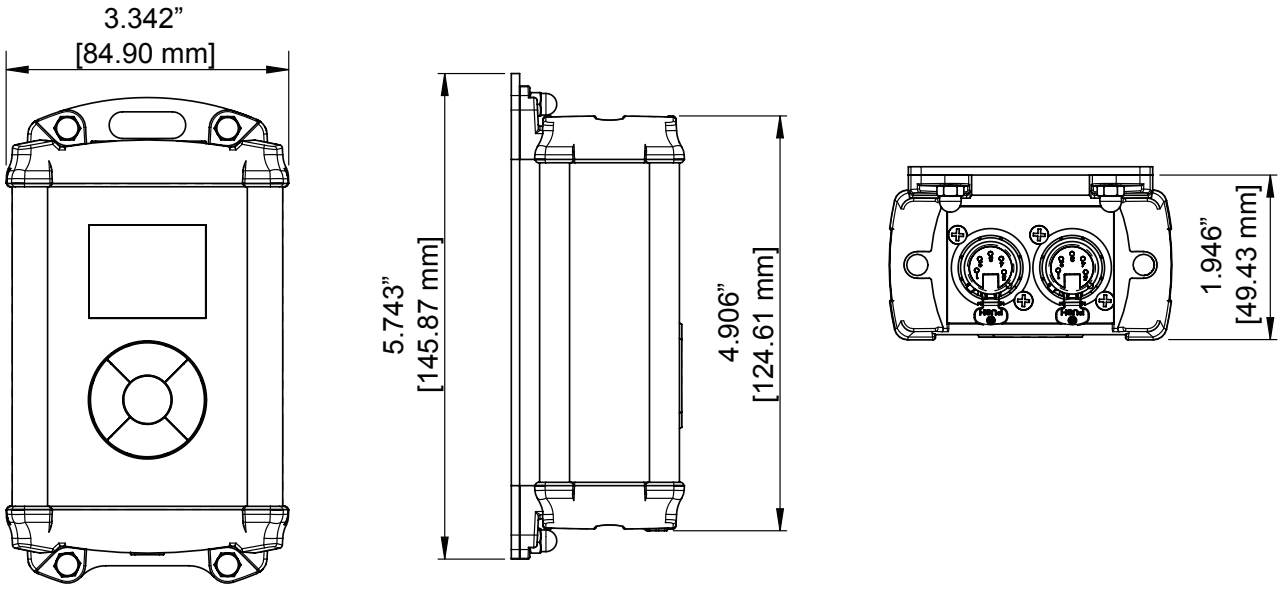



Includes Plate for attachment of safety cable

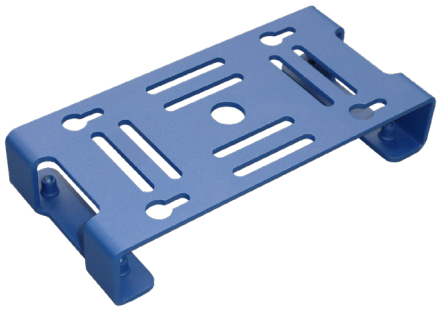

Optional Clamp Plate for clamp or coupler or for wall mounting

Technical Specifications	
Part Number	PPIQC215MCD
Ethernet Ports	1
DMX Ports	2
DMX Connectors	Neutrik XLR5 Female (NC5FAV)
DMX Port Isolation	Optical, up to 1000 V
Ethernet Connector	Neutrik EtherCON RJ45
Ethernet Type	10/100 Base-T
Network Protocols	ArtNet, sACN (E1.31)
Additional Features	RDM; HTP merging; easy priority; sACN priority
Power	24/48 VDC (PoE In)
Power Consumption	2.5 W
Cooling	Convection
Operating Temp.	-20 to +40 ºC
Operating Humidity	10-85%
Unit Dimensions w/Plate (WxHxD)	5.7 x 3.34 x 2 in (146 x 84.9 x 51 mm)
Unit Dimensions w/o Plate (WxHxD)	4.9 x 3.34 x 1.875 in (124.6 x 84.9 x 47.6 mm)
Unit Weight w/plate (unpacked)	1.05 lb (0.48 kg)
Packed Dimensions (WxHxD)	8.5 x 5.5 x 4 in (215.9 x 139.7 x 101.6 mm)
Shipping Weight	1.35 lb (0.6 kg)
Accessories	PPIQSBP - IQ Micro backing plate (included) SAF1/8X25B - 25” Safety Cable (optional) PPIQCBP - IQ Micro clamp plate (optional)

Los Angeles +1 818.899.8818
London +44 (0)20.8574.9700
New York +1 201.896.8600
tmb www.tmb.com
Toronto +1 519.538.0888
Beijing +86 10.8492.1587
Riga +371 6389 8886

© 2025, TMB. All rights reserved. LITPPXIQMICRO Effective: 25 March 2025
Specifications are subject to change without notice. This information supersedes all previously supplied information.

sales@tmb.com