ProPlex® IQ

IQ ONE+ MINI

Powerful, Durable, Bidirectional, Mini Ethernet-DMX Node




- **Bidirectional conversion and merging of Ethernet protocol (sACN/ArtNet) DMX data**
- **Powerful, comprehensive, useful feature set**
- **Rugged, tour-ready ProPlex "BSH" Mini PortableMount enclosure**
- **Shock-mounted components. Purpose-designed ventilation. Peerless reliability.**
- **ProPlex Software-ready, for simple, yet powerful total system management and control**
- **Intuitive, simple, OLED display, or web browser control of all basic functions**
- **Dual EtherCon ports for daisy-chain, multi-unit topology, with close to zero latency**
- **Power via PowerCon with power thru, or via PoE**
- **All genuine Neutrik connectors: Locking PowerCon, EtherCon, XLR**
- **Complete with rugged, multi-attachment, removeable yoke**

C US

BUILT TO LAST!

ProPlex - DATA DISTRIBUTION YOU CAN DEPEND ON

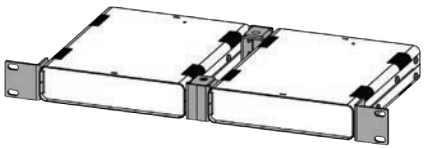

1U RackMount Kit options available

Worldwide Exclusive Distribution

Los Angeles +1 818.899.8818 | London +44 (0)20.8574.9700 | New York +1 201.896.8600 | Toronto +1 519.538.0888 | Beijing +86 10.8492.1587 | Riga +37 16.868.8955

tmb www.tmb.com


sales@tmb.com


© 2022, TMB. All rights reserved. LITPPXIQ1+MINI Effective: 3 October 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.


Specifications	
Part Number	PPIQA+425MR
Ethernet Ports	2 Neutrik EtherCon RJ45, 1 with PoE power input
ArtNet/sACN Universes	4 max.
DMX Ports	4 Neutrik XLR5 Black/Gold Female
DMX Port Isolation	Optical, up to 1000V
Network Protocols	ArtNet, sACN (E1.31)
Ethernet Type	100 Mbit
PoE Standard	IEEE 802.3af-2003 standard
Power	100-240 VAC 50-60 Hz or PoE
Power Connectors	Neutrik PowerCon IN and THRU
Power Consumption	10 W max
Operating Temp.	-20 to +40 ºC
Enclosure	ProPlex BSH Small
Unit Dimensions (WxHxD)	7.72 x 3.63 x 8.75 in [196.1 x 92.3 x 222.3 mm] w/yoke 7.72 x 1.72 x 8.75 in [196.1 x 43.7 x 222.3 mm] w/o yoke
Unit Weight (unpacked)	5.3 lb [2.4 kg]
Shipping Dimensions (WxHxD)	9.75 x 4.75 x 13.75 in [247.7 x 120.7 x 349.3 mm]
Shipping Weight	5.9 lb [2.68 kg]


Ordering Codes	
Part Number	**Description**
PPIQA+425MR	ProPlex IQ One+ Mini 4-port Ethernet-DMX Node
PP1RMKITSS	ProPlex 1U RackMount Kit, Small, Single
PP1RMKITSD	ProPlex 1U RackMount Kit, Small, Dual
PP1RMKITSMD	ProPlex 1U RackMount Kit, Small+Medium, Dual


© 2022, TMB. All rights reserved. LITPPXIQ1+MINI Effective: 3 October 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

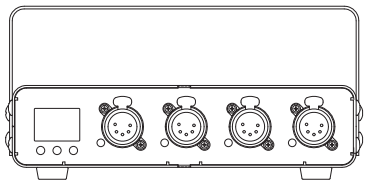

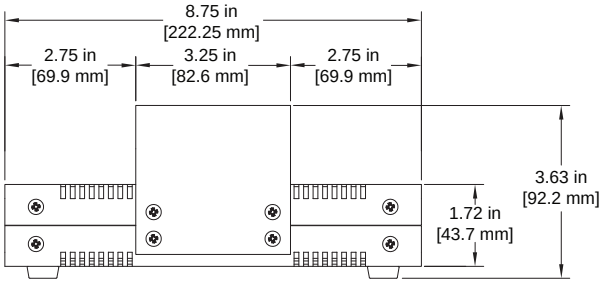


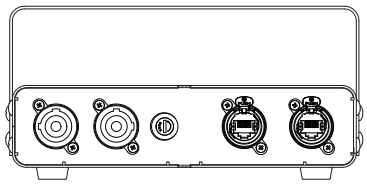


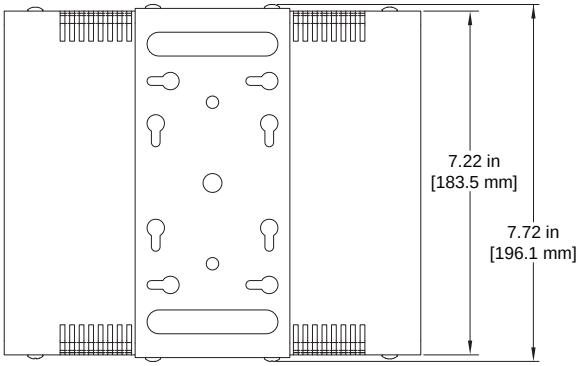

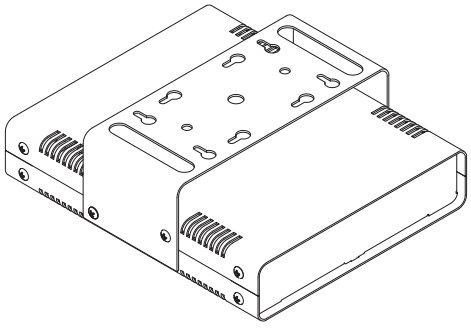

Optional RackMount Kits

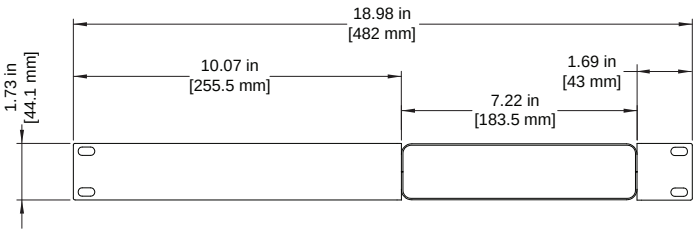

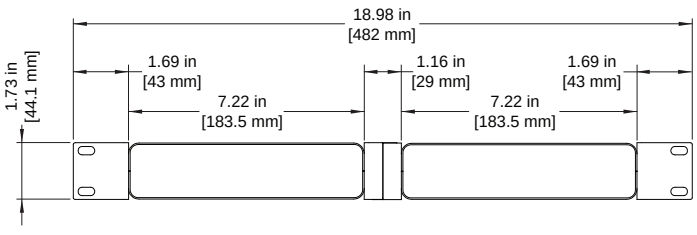

© 2022, TMB. All rights reserved. LITPPXIQ1+MINI Effective: 3 October 2022
Specifications are subject to change without notice. This information supersedes all previously supplied information.

CONTACT INFORMATION

LOS ANGELES HEADQUARTERS

527 Park Avenue | San Fernando, CA 91340, USA

Tel: +1 818.899.8818 | Fax: +1 818.899.8813

sales@tmb.com

TMB 24/7 TECH SUPPORT

US/Canada: +1.818.794.1286

Toll Free: 1.877.862.3833 (1.877.TMB.DUDE)

UK: +44 (0)20.8574.9739

Toll Free: 0800.652.5418

techsupport@tmb.com

LOS ANGELES +1 818.899.8818

LONDON +44 (0)20.8574.9700

NEW YORK +1 201.896.8600

BEIJING +86 10.8492.1587

CANADA +1 519.538.0888

RIGA +37 16.868.8955

www.tmb.com

A full service company providing technical support, customer service, and follow-up. Providing products and services for the industrial, entertainment, installation, defense, broadcast, research, telecommunications, and signage industries. Servicing the global market from offices in Los Angeles, London, New York, Toronto, Beijing, and Riga.